

POLARIS SPORTSMAN FRONT RACK EXTENDER KIT



ZP-YJ-030503-065


BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.


IMPORTANT

Your FRONT RACK EXTENDER KIT is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

INSTRUCTIONS

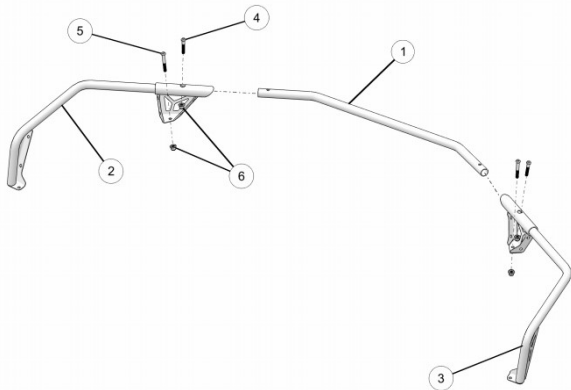


3. Repeat Step 2 for RH rack extender 3 installation.

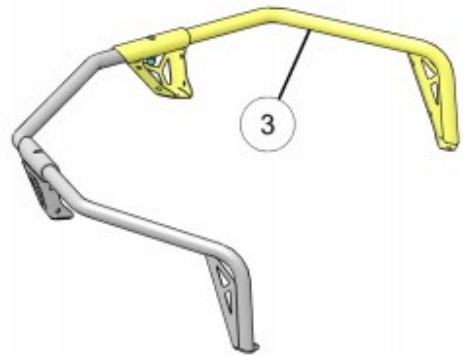


Installation

1. Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.


2. Insert center rack extender 1 into LH rack extender 2. Align the fastener mounting holes of both extenders and install the screws 4 and nuts 6. Do not tighten fasteners.

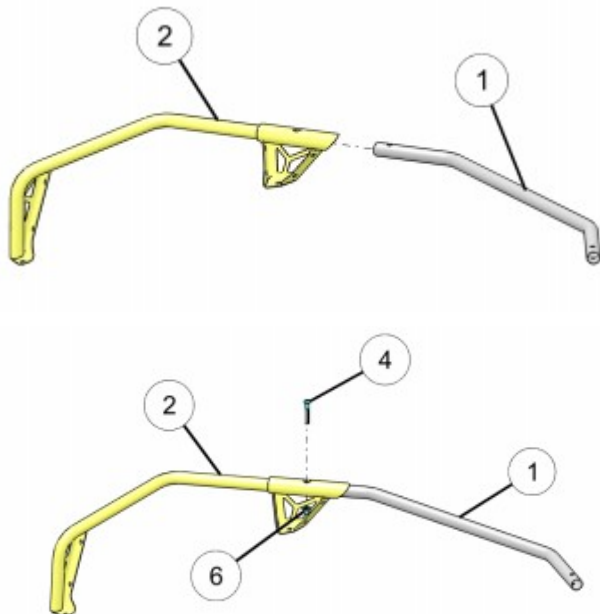

4. Remove two screws (A) from front rack (B). Retain screws for reuse.

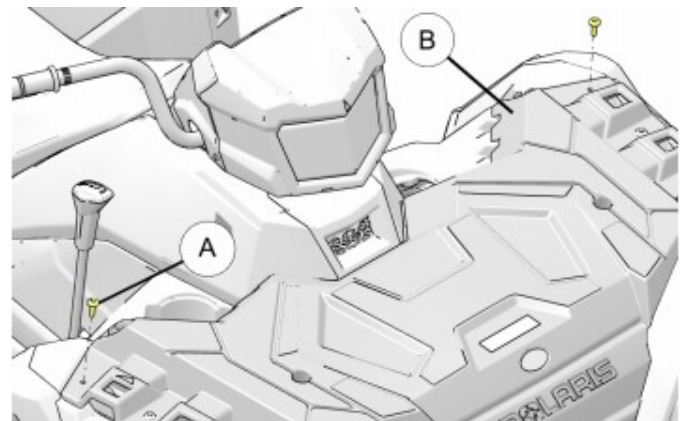

5. Detach the rubber latch (C) on both sides to open the front rack (B).

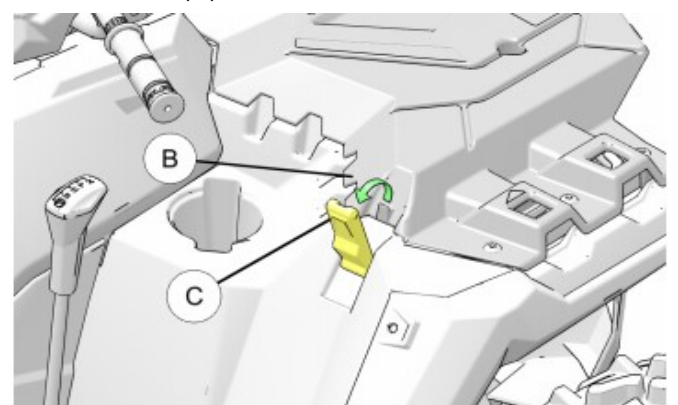


POLARIS SPORTSMAN FRONT RACK EXTENDER KIT




ZP-YJ-030503-065


6. Open the front rack (B) as shown

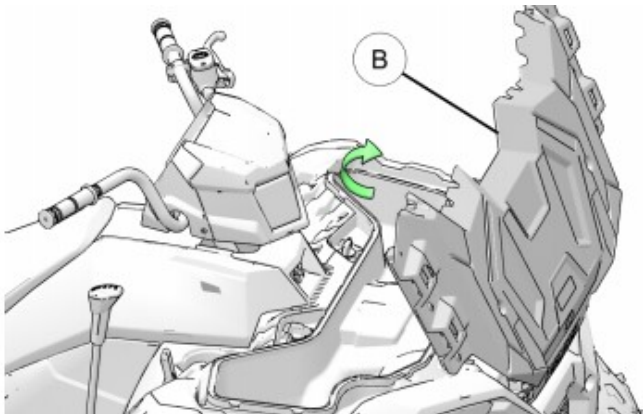



7. Remove two screws (D) from the front rack tube (E). Discard both the screws.

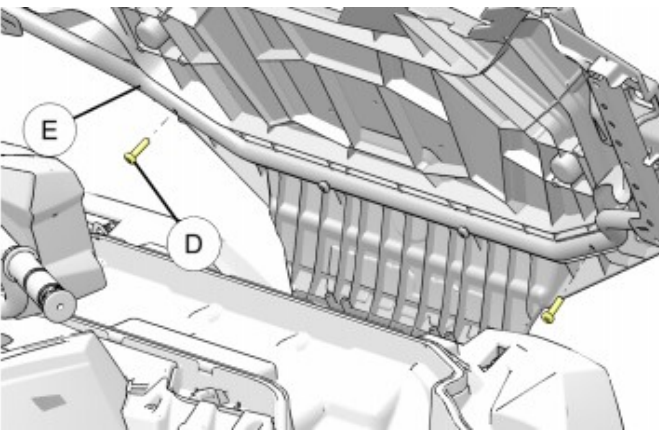


8. Using existing holes as a guide, drill through rack in locations (F) using drill bit. Ensure that the holes pass through the front rack (B).

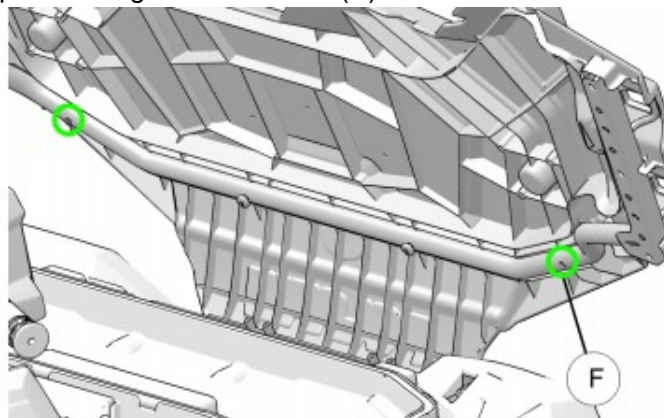

9. Place front rack extender assembly on front rack (B) and install two screws 5 and nuts 6. Do not tighten fasteners.

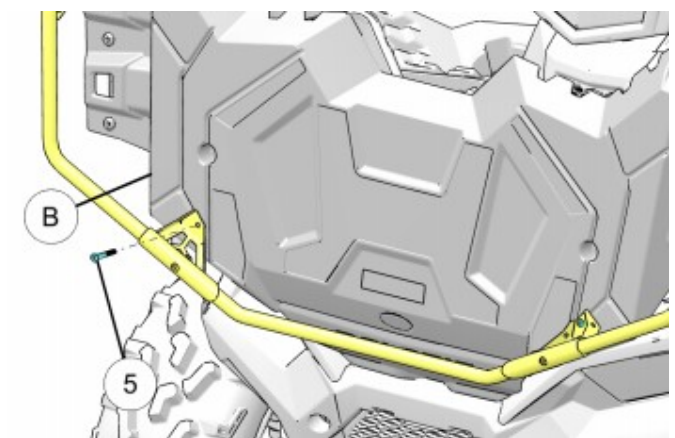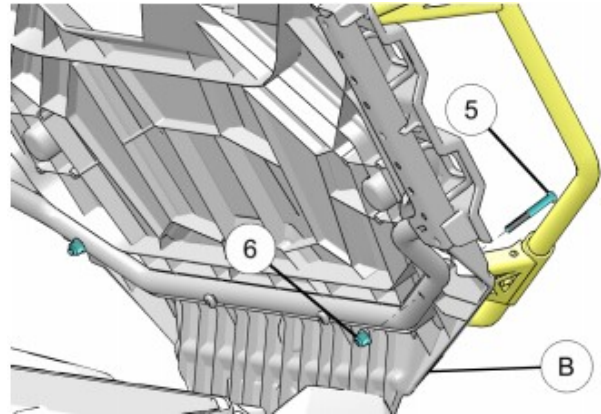

10. Close the front rack (B) along with rack extender assembly. Reinstall two screws (A) removed in Step 4 on front rack (B) through rack extender assembly as shown.

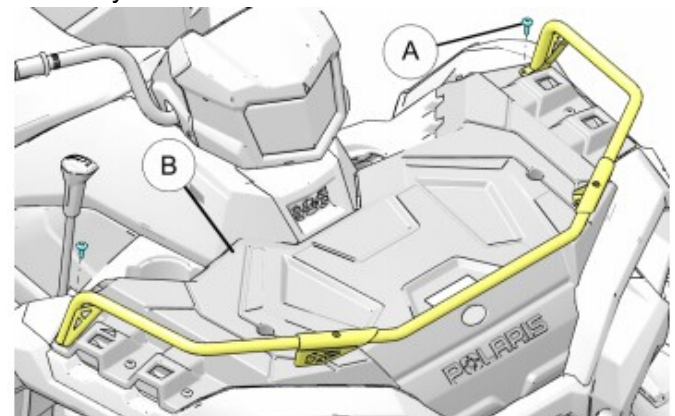

11. Tighten all fasteners to below specification. Secure front rack using rubber latches (C).

Torque : 6 ft. lbs. (8.1 Nm)