ZP-YJ-030603-108



BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

IMPORTANT

The Foot Rest are exclusively designed for your boat. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

INSTALLATION INSTRUCTIONS

1. After removing the overall protection plate of the yacht, pry off all the nut limits on the back and replace them with the product accessory bag (sponge strips should be placed around the nut limits in advance when replacing). After replacing the nut limits, reinstall the overall protection plate to the original position, as shown in the figure below:

Note: when installing the nuts in some positions, the limit on the nut should be cut off as shown in Figure 1, and the limit on the position in Figure 2 should not be cut off.



Figure 1

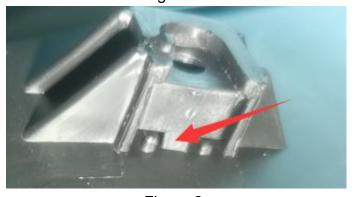


Figure 2







Step Wedges Foot Rest Kit for Sea-Doo Spark

ZP-YJ-030603-108






2. Install the mount kit, do not install screws first, then install the guard plate and then fix it with screws (on the other side can be installed as the same steps). As shown in figure: Note: There are two sizes of screws for installing guard plate, 1pcs M6*50 Screw, 3pcs M6*30 Screws.







3. Installation complete.

