

Front Mesh Grill with Light for Polaris Ranger SP 570



ZP-YJ-030502-028

BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

IMPORTANT

The Front Mesh Grill is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

INSTALLATION INSTRUCTIONS

Note: Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.

Product picture



INSTALLATION

1. First open the engine cover of the original vehicle and remove the mesh grill of the original vehicle. As shown in picture:




2. Thread the wire harness of the mesh grill with light into the gap of the original vehicle, then fix the mesh grill, disconnect the wire harness plug-ins of the original headlight on one side, connect the plug-in at one end of the mesh grill harness with the plug-in of the whole vehicle, and connect the plug-in at the other end of the mesh grill harness to the headlight. Reinstall the cover after finishing. As shown in picture:

Front Mesh Grill with Light for Polaris Ranger SP 570

ZP-YJ-030502-028

SAUTV5®

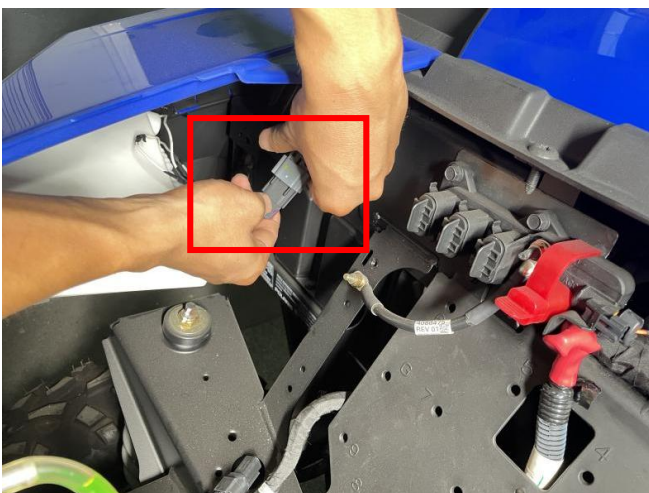

3. Finally, according to the screw hole positions on the mesh grill, drill fixed holes by a 3MM drill bit , and then fix the mesh grill by screws. As shown in picture:

Note: When drilling, press the mesh grill by hand, make the mesh grill and the original vehicle fit better.

Front Mesh Grill with Light for Polaris Ranger SP 570

ZP-YJ-030502-028

SAUTV5[®]



4. Installation finished.

