

Snap-In Fender Installation Kit For Sea-Doo



ZP-YJ-030603-141

BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted. Please retain these installation instructions for future reference.


IMPORTANT

This SNAP-IN FENDER INSTALLATION KIT is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris.

INSTALLATION INSTRUCTIONS

1. Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.

2. Mounting plate installation.

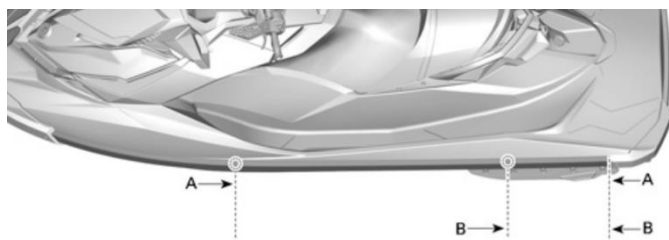

DRILLING LOCATIONS - RXP-X, GTI, WAKE, GTR AND GTS MODELS

A. 1 730 mm (68.1 in)


B. 470 mm (18.5 in)

DRILLING LOCATIONS - GTX, RXT, RXT-X AND WAKE PRO MODELS

A. 1 815 mm (71.5 in)

B. 495 mm (19.5 in)




All models

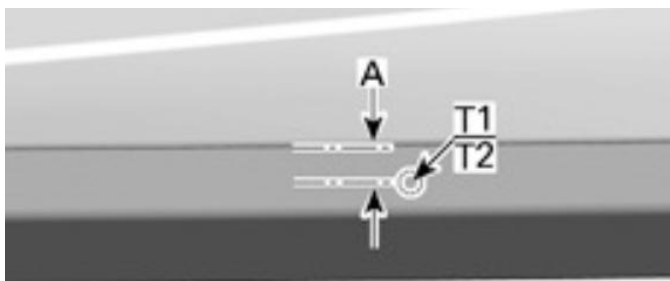

DRILLING LOCATION

A. 13 mm (.5 in)

Note: With vehicle level, drill perpendicular to floor not bumper.

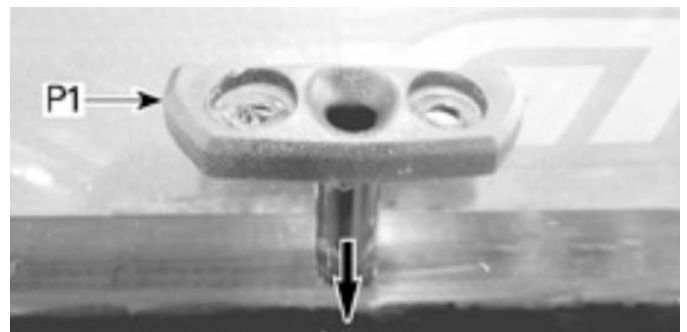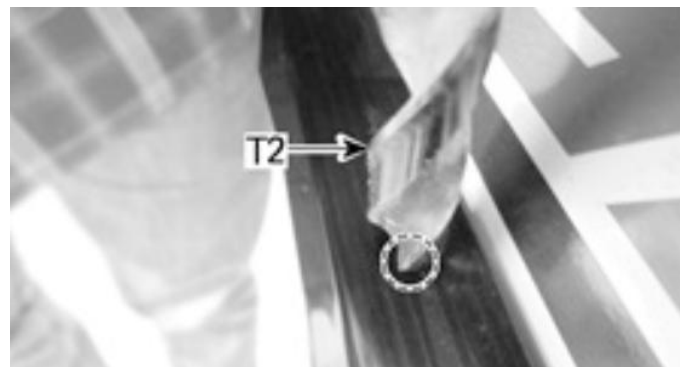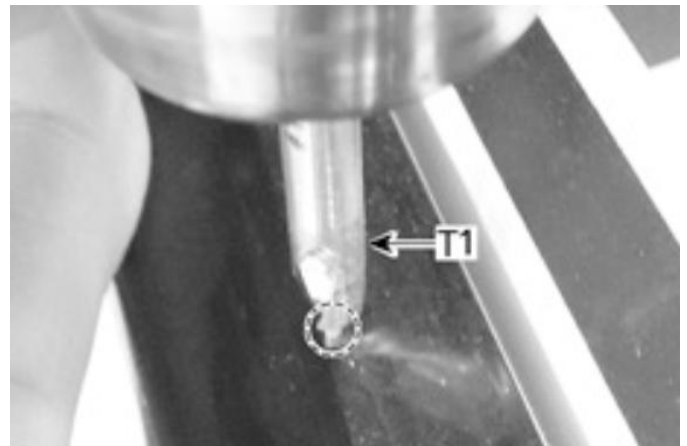

Snap-In Fender Installation Kit For Sea-Doo

ZP-YJ-030603-141

Note: Drill perpendicular to mounting plate [P1].

