

XT Front Bumper Guard for Cam-Am Outlander G2

SAUTV5

ZP-YJ-030606-010

BEFORE YOU BEGIN


Read these instructions and check to be sure all parts and tools are accounted. Please retain these installation instructions for future reference.

IMPORTANT


This Front Bumper Guard is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris.

INSTALLATION INSTRUCTIONS

1. Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.
2. Products and accessories:

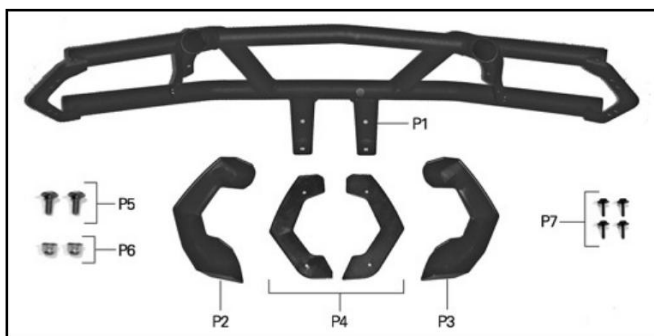


3. Preassemble front bumper with LH cap [P2], bracket cover [P4] and M4 x 16 screws [P7].

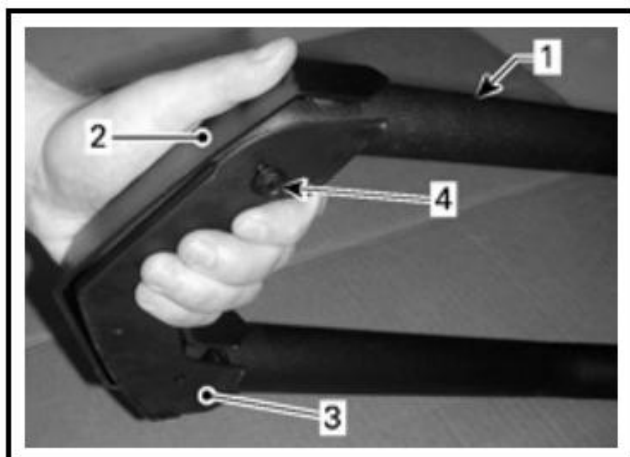

1. Front bumper [P1]
2. LH cap [P2]
3. Bracket cover [P4]
4. M4 x 16 screw [P7]


4. Tighten screws (hand torque).

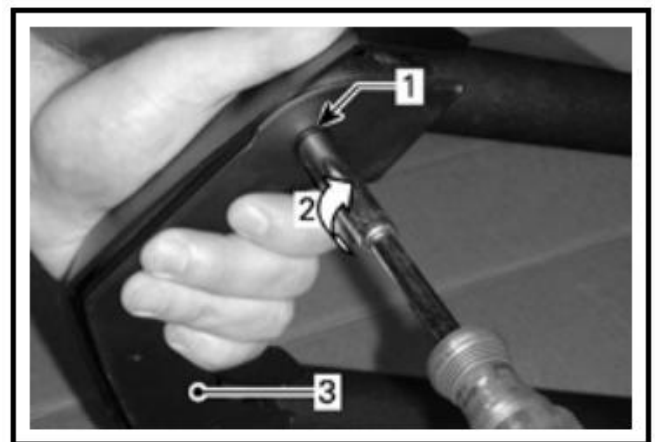

1. M4 x 16 screw [P7]
2. Tighten screw (hand torque)
3. Bracket cover [P4]

5. Remove Torx bolt from the rack front support (not shown).

NOTE: The cage nut, on the other side of the support, must remain in place for re-installation.

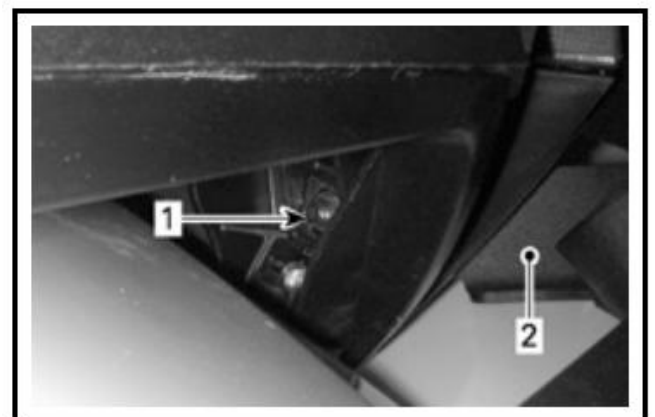


1. Cage (elastic) nut
2. Bumper upper mount (LH)

6. Position and install front bumper upper mounts through the rack front supports.


XT Front Bumper Guard for Cam-Am Outlander G2

ZP-YJ-030606-010

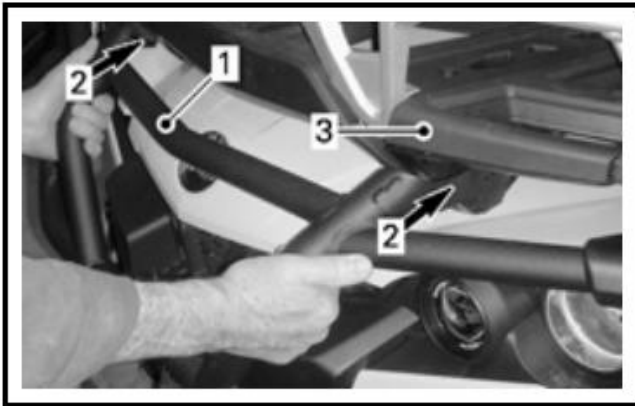


- 1. Front bumper [P1]
- 2. Upper mounts (LH and RH)
- 3. Rack

7. Secure top of bumper using previously removed Torx screw. Just slightly tighten for now.

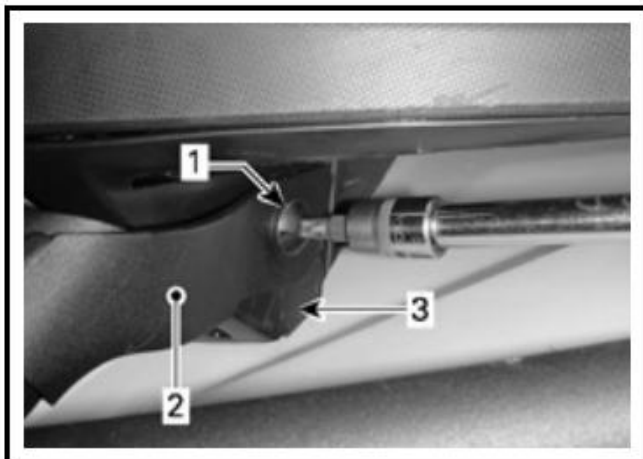


- 1. Torx screw
- 2. Bumper upper mount (LH)
- 3. Front rack support

8. Secure the bottom of bumper with M8 x 20 flange bolt [P5] and M8 elastic flange nut [P6].

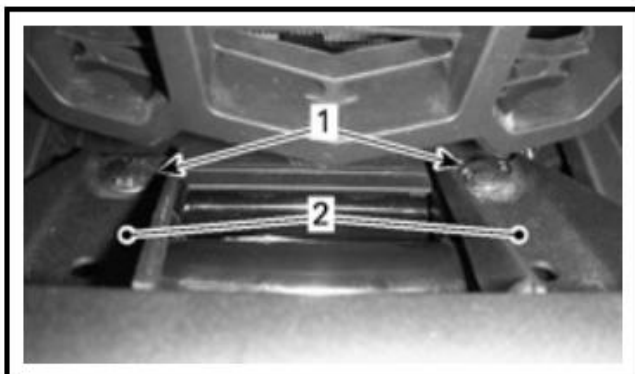



- 1. M8 x 20 flange bolts [P5]
- 2. Bumper lower mounts

9. Install M8 nut [P6] to the M8 x 20 bolt.

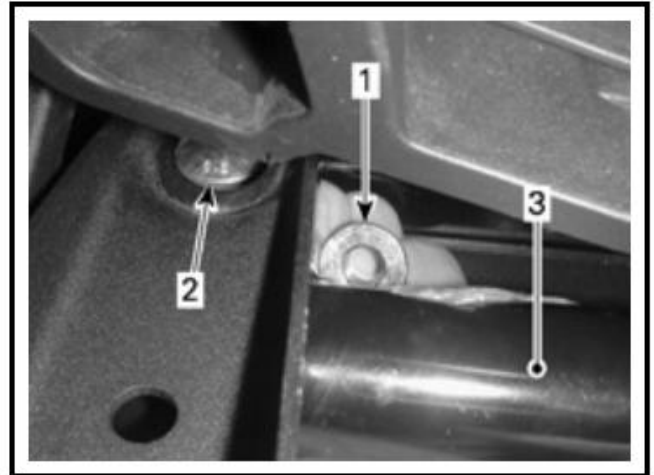

- 1. M8 elastic flange nut [P6]
- 2. M8 x 20 flange bolt [P5]
- 3. Standard (built-in) bumper

10. Tighten nut slightly for now.

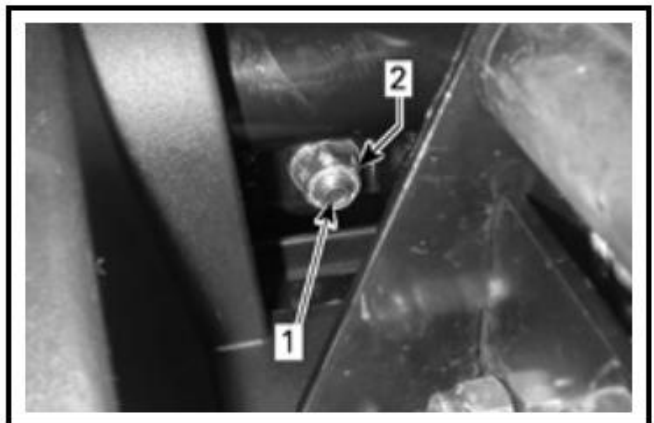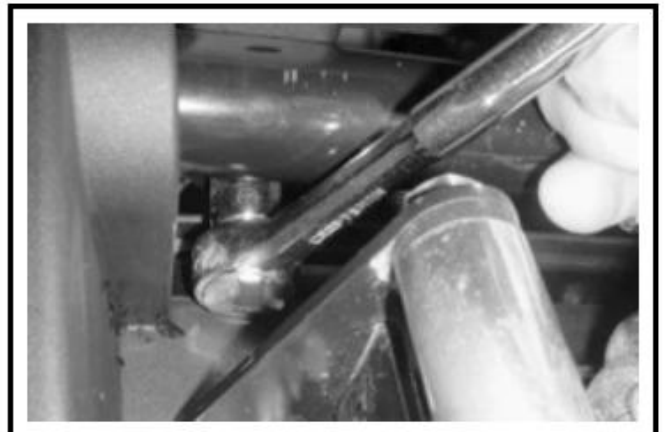

- 1. M8 elastic flange nut [P6]
- 2. M8 x 20 flange bolt [P5]

11. Tighten lower and upper fasteners.

Note: Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.