

## **BEFORE YOU BEGIN**

Read these instructions and check to be sure all parts and tools are accounted. Please retain these installation instructions for future reference.

## **IMPORTANT**

This Tail Light is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris.

## INSTALLATION INSTRUCTIONS

1. Open the door of the rear cargo box and use tools to pry off the nylon buckle of the exterior decorative plate of the rear cargo box (without removing the decorative plate, leaving gaps for the subsequent replacement of the taillight). As shown below:





2. Remove the taillight after unscrewing the nut fixing the original taillight, and disconnect the wiring harness copper parts of the original taillight. As shown below:








3. Install the new taillight on the car, fix it with the nut flat pad of the original car, and then butt the taillight wiring harness again with the vehicle wiring harness. At this time, you can start the car, check whether the taillight function is normal, and install the decorative plate back to the original position after completion. (Replace the taillight on the other side by following the same steps as above.) As shown below:

NOTICE:(1)When connecting the taillight harness to the vehicle harness, connect the taillight harness with the same color.


(2)If the function is not correct as shown in the figure, you can try to swap the yellow wire with the blue line.







4. Installation completed!

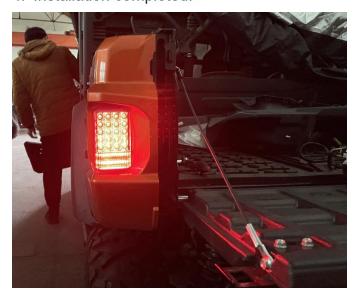

**Note:** Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.