

BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

The Front Grille with Light is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

INSTALLATION INSTRUCTIONS

Note: Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.


1. Product and accessories pictures:




2. First, remove the original vehicle grille. As shown in picture:




3. Take out the extension cables that come with the product and connect them to the grille light harness. Then, disconnect the harness plug of the original vehicle headlight, find the positive and negative poles on the plug, and break the skin of the extension cable and connect the extension cable to it. After insulation protection is done, reconnect the plug to the original headlight. As shown in picture:

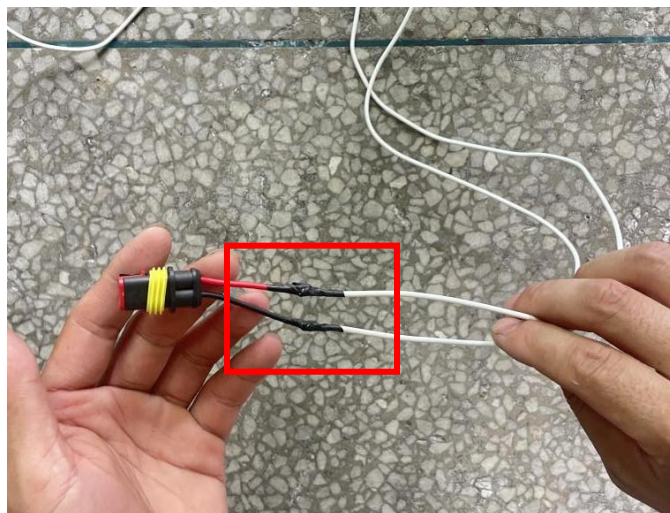

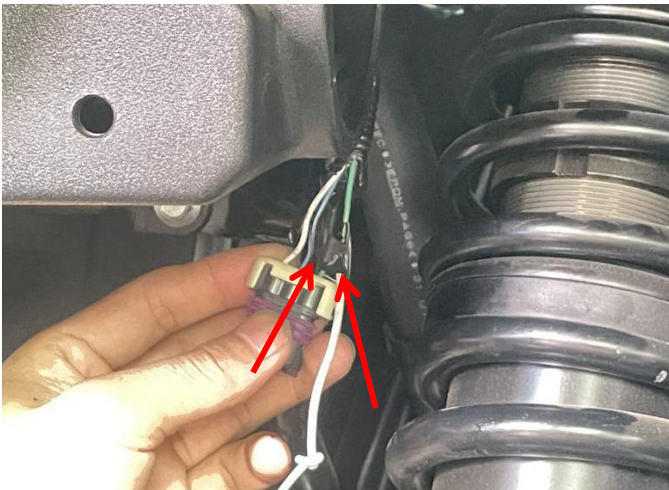

4. Pull the extension cable that has been connected to the power supply along the gap to the grille and connect it with the grille light. Then, install the grille and prepare a 6.5mm drill bit. Drill corresponding screw holes according to the screw hole positions on the grille. Then, attach a steel card to the hole position and fix it with screws. As shown in picture:

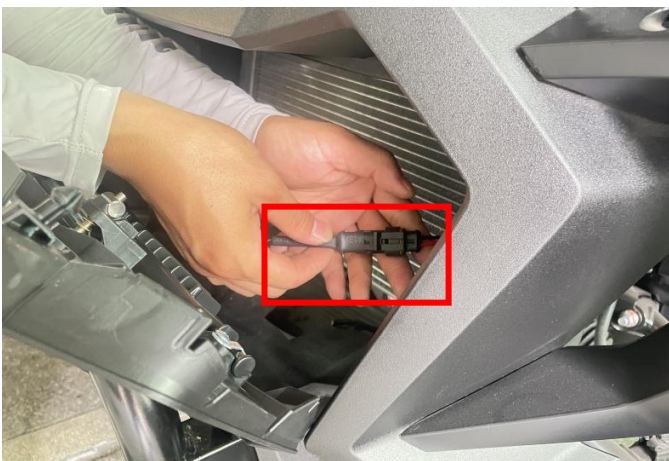

5. Installation finished.



Note: Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.