



BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

The Fender Flares and Mud Flaps Kit is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

INSTALLATION INSTRUCTIONS

Note: Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.

Fender Flares

Picture of product



Installation of Front Fender Flares

1. Remove the original fender flares first, and then move the steel clips on the original fender flares to the new fender flares according to the original position. As the picture shows:







2. Install the new fender flare on the original vehicle, and then use the screws of original vehicle(or screws in the kit) to fix it. As the picture shows:

ZP-YJ-030510-003











Installation of Rear Fender Flares


3. Remove the seats of original vehicle, and then remove the rear decorative plate and the original fender flares. As the picture shows: decorative plate and secure it with snap fasteners. As the picture shows:

Notice: When installing the new fender flares,

4. Attach the new fender flares to the

the positioning holes on the fender flares need to correspond to the positioning buckles on the decorative plate.



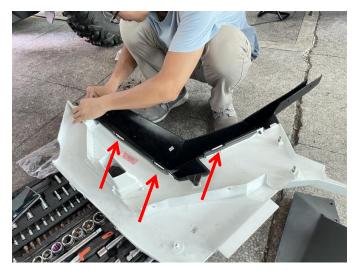

ZP-YJ-030510-003







5. Reinstall the decorative plate with the new fender flares back to the original vehicle, and finally install the other accessories back to the original position. (The front and rear fender flares on the other side can be installed in the same way as above). As the picture shows:





6. Installation complete.





ZP-YJ-030510-003



Mud Flaps


Picture of product



Installation of Front Mud Flaps

1. First place the front mud flaps on the front fender flares and then use the self-tapping screws in the kit to fix the flaps according to the fixing holes in turn. As the picture shows: Note: There are positioning holes on the flaps, it must be installed corresponding to the positioning columns on the fender flares.



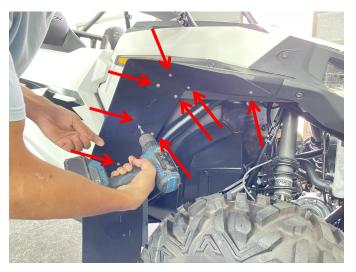



Installation of Rear Mud Flaps

2. Place the rear flap on the rear fender, and then prepare a 6MM drill bit to punch screw holes in turn according to the fixing holes on the flaps, and then use the screws and nuts in the kit to fix the flaps. (The flap on the other side can be installed in the same way as above). As the picture shows:

ZP-YJ-030510-003











3. Installation finished.



Note: Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.