

ZP-YJ-031101-004

BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

These Headlights with Halo Ring are exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

INSTALLATION INSTRUCTIONS

Note: Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.

Product and accessories picture:




1. First, remove the original vehicle hood, and then remove the original vehicle headlight installation housing as well.As shown in picture:





2. After removing the original headlight from the installation shell, replace it with a new headlight. (It can be fixed using the original vehicle screws or the product's matching screws).As shown in picture:

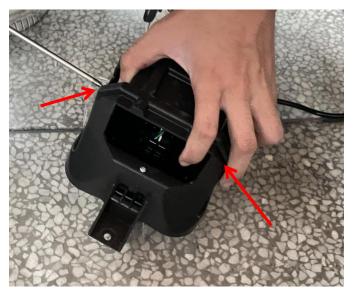

Headlights with Halo Ring for Yamaha Wolverine

ZP-YJ-031101-004






3. Install the new headlight back on the original vehicle, and connect the wiring harness plug-in, then prepare an extension cable in the accessory package, find the ACC electrical box in the front cabin of the original vehicle, strip one end of the extension cable and connect it in the electrical box, after completion, pull the extension cable to the headlight, connect it with the red optical conductor on the headlight, and do insulation protection, and finally install it back on the cover of the original vehicle. (The headlights on the other side are replaced in the same way).As shown in picture:







4. Installation finished.

Headlights with Halo Ring for Yamaha Wolverine



ZP-YJ-031101-004



Note: Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.