

# LED Headlights with High Low Beam for Kawasaki

## Mule PRO-FXT

ZP-YJ-031001-004



### BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

These LED Headlights are exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.


### INSTALLATION INSTRUCTIONS

Note: Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.

Product and accessories picture:



1. First, remove the hood and front grille of the original vehicle, and then use tools to cut off the decorative panel reserved for installing headlights on the original grille. (Before disassembling the grille, it is necessary to disconnect the wiring harness plug of the original vehicle's headlights in advance).As shown in picture:

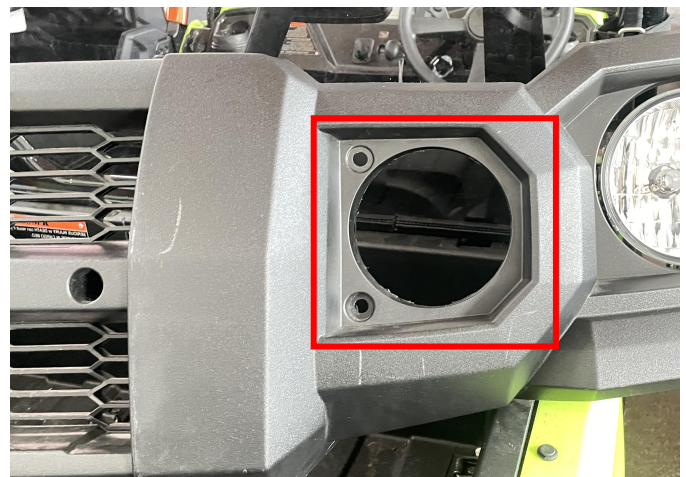

# LED Headlights with High Low Beam for Kawasaki Mule PRO-FXT




ZP-YJ-031001-004

2. Take out the steel clips from the accessory package and attach them to the rear housing of the headlight. Then, clip the aluminum lining pipe into the center hole of the plastic mounting bracket, and place a flat pad in front and back of the outer ring. Finally, fix the mounting bracket to the headlight (the bracket is divided into left and right sides, and needs to be distinguished in advance before installation).As shown in picture:







3. Use the longest screw in the accessory package, pass through the iron bracket and spring, and use a square screw to fix the iron bracket to the headlight (the height angle of the headlight can be adjusted through this screw). After completion, the headlight can be fixed on the original grille.As shown in picture:

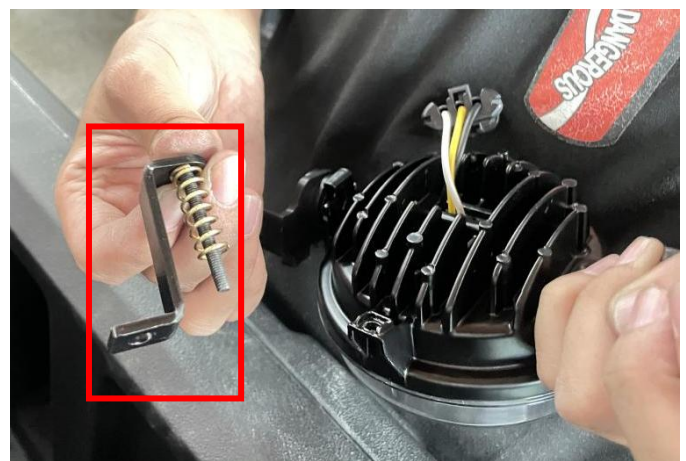

# LED Headlights with High Low Beam for Kawasaki Mule PRO-FXT



ZP-YJ-031001-004

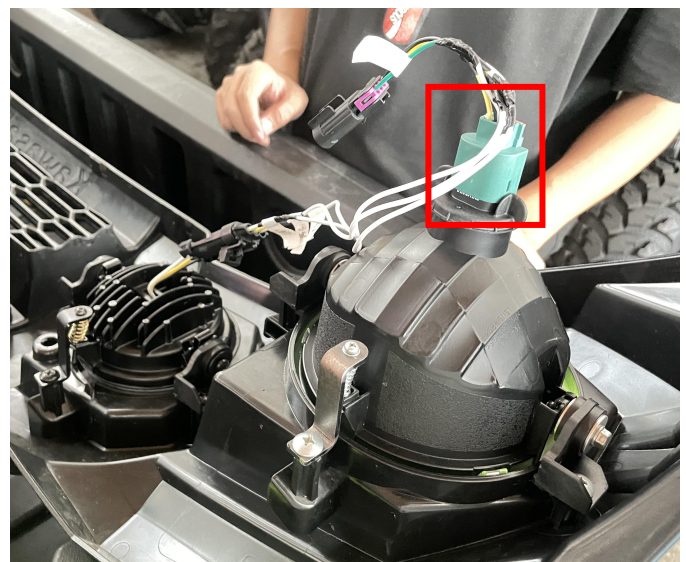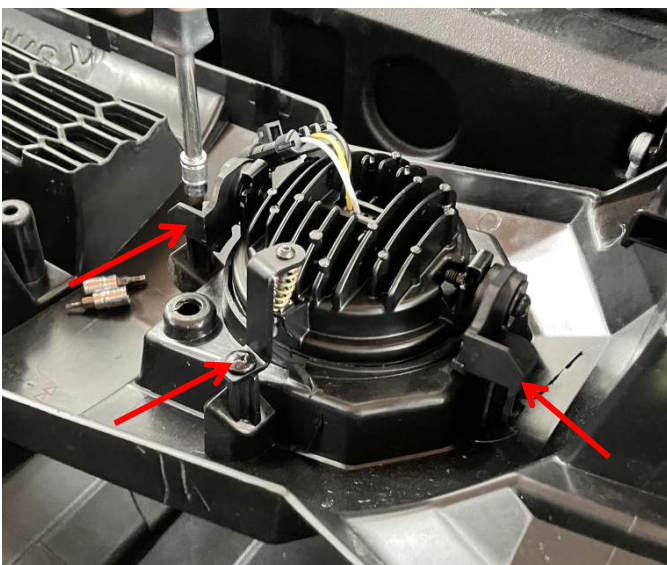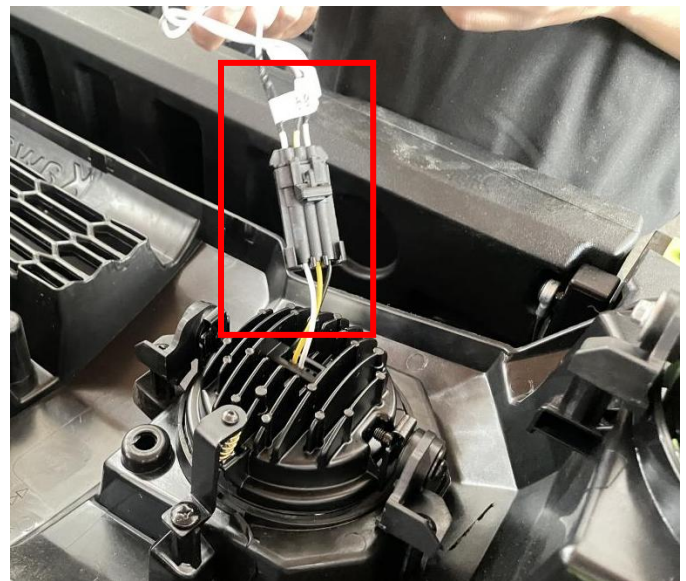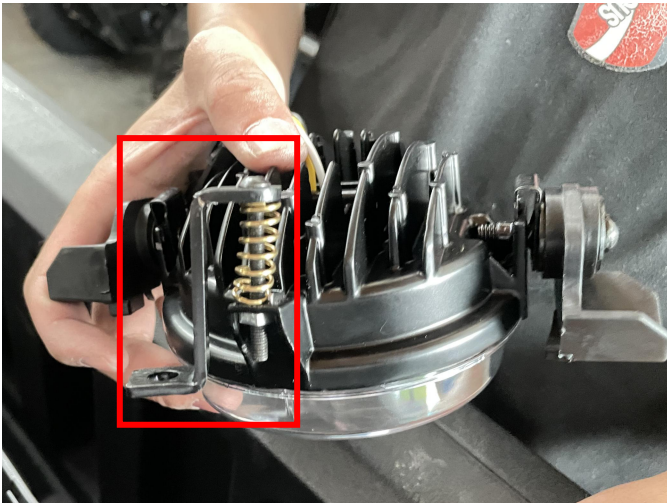

4. Connect one end of the matching adapter cable for the headlight to the new headlight harness connector, and the other end to the original headlight. (The other headlight is assembled and fixed in the same way).As shown in picture:

5. Install the grille with the installed headlights back into the original vehicle and fix it. Finally, connect the remaining plug on the adapter line with the wiring harness plug of the entire vehicle.As shown in picture:




# LED Headlights with High Low Beam for Kawasaki Mule PRO-FXT

ZP-YJ-031001-004



**Note:** Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.

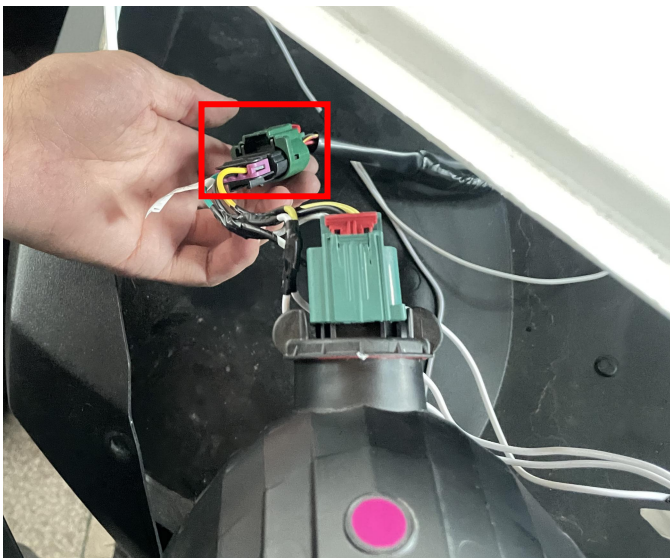

6. Installation is complete!

