

ZP-YJ-030503-171

BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

IMPORTANT

This *Inner Door Handle Assembly* is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

INSTALLATION INSTRUCTIONS

Note: Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.

Product picture



1. First unscrew the screws on the original interior door panel, and remove the inner switch trigger trim. As the picture shows:





2. Pry open the decorative cover of the hinge of the door panel, unscrew the internal screws, and remove the inner door panel. As the picture shows:





ZP-YJ-030503-171





3. Unscrew the screws securing the outer door handle and panel, remove the limiting tension rope of the outer door handle, and remove the panel. As the picture shows:












ZP-YJ-030503-171



4. Unscrew the screw fixing the trigger of the inner door switch, unfasten the limit pull rope, replace and install the new trigger switch, fix with the original screws, and then reconnect the limit pull rope, test whether the trigger switch can open the door panel normally, and reinstall the outer door switch and door panel after confirming. As the picture shows:



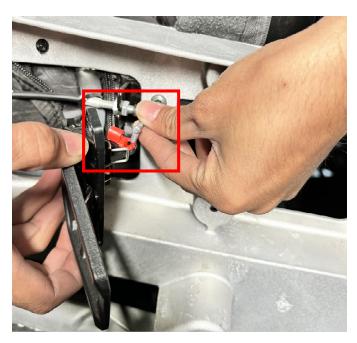







ZP-YJ-030503-171

5. The installation is complete.



Note: Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.