

BEFORE YOU BEGIN


Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

The nerf bars are exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

INSTALLATION INSTRUCTIONS

Note: Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.

1. Use 6 M8 * 55 hex screws and 6 M8 jam nuts to combine 3 parts 1 and part R through 3 connecting tubes (part 2), (same assembly on the other side). As shown in picture:

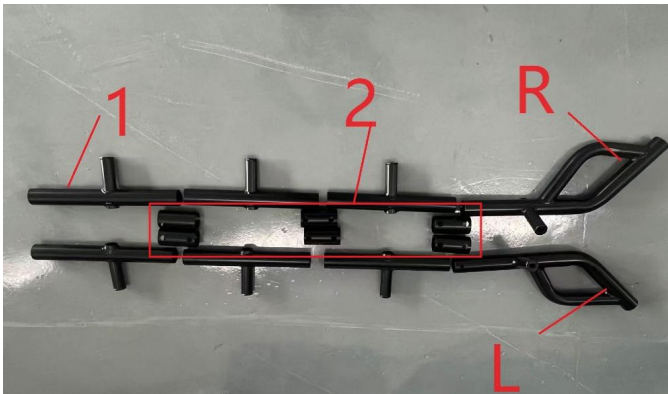

2. Use a 50 hole opener to make holes in the reserved positions at the bottom of both sides, with 4 installation holes on each side. As shown in picture:



3. For ease of installation, use an M10 tap to thread back the built-in M10 threads after opening the hole. As shown in picture:



4. Install the nerf bar in the four mounting holes with four M10*20 flange socket head cap screws and tighten the screws. As shown in picture:

Nerf Bars for Kawasaki Teryx KRX4 1000



ZP-YJ-031006-004



Note: Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.

5. Then tighten the M8*55 connecting screws, use 8 plastic caps to plug the holes of the mounting position and complete the installation. As shown in picture:

